


To generate the View, angular gathers information from the Template; applies Controller functions to associated Scope objects; links Model properties to the associated Scope objects; then generates a transformed DOM, which is rendered in the browser.

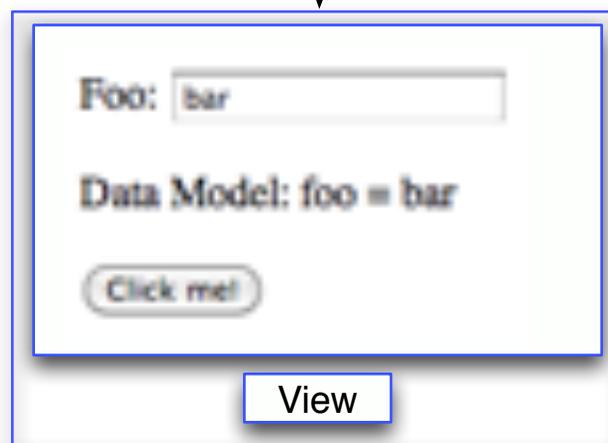

Angular sets up two-way data-binding between the value of the property "foo" in the FooCtrl scope, and the input text box in the View.

The value for the button is projected from the property "buttonText" in the FooCtrl scope to the button in the view.